

# Table Top Autoclave - Class B


## Robust and Compact Space-efficient

Hospital CSSD Equipment

**LuxMed**<sup>®</sup>  
Healthcare Redefined

### Table Top Autoclave Class B Series

The table top autoclave can be used for medical and surgical items in ophthalmology, dentistry and internal medicine clinics, such as packaged items, hollow and porous items for sterilization, and can also be used in emergency rooms and small laboratories.

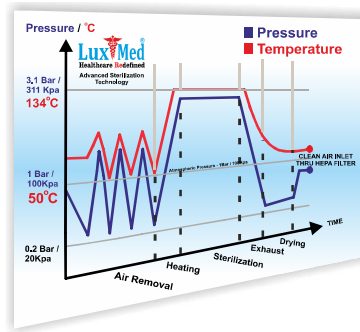

LM-TTA-B series sterilizer is an automatic high temperature and pressure rapid sterilizer which works with steam as medium.

It can be widely used in department of stomatology and ophthalmology, operating room, supply room, dialysis room and other medical institutions. It is unpacked items, solid instruments, dental hand pieces, endoscopes, implantable instruments, dressing fabric and rubber tubes, etc.

Features:	
<b>1. Build-in open type water tank</b>	The sterilizer adopts easy clean open type water tank which can support repeated program running if fully injected with water.
<b>2. High-efficiency ultimate vacuum</b>	The sterilizer adopts high-efficiency low noise vacuum system which has excellent effects.
<b>3. Large LCD display for LM-TTA-B</b>	The LCD screen can display temperature, pressure, time, operating status, failure warning and other information.
<b>4. Multiple program types</b>	The system has various programs that include packed items, unpacked items, BD testing program, vacuum testing program and drying function.
<b>5. Standard USB port for LM-TTA-B</b>	Users can store the sterilization data with RS-232 / USB
<b>6. Mini printer can be attached to record the process of sterilization.</b>	

<b>Model</b>	LM-TTA-B-25B
<b>Capacity</b>	25L
<b>Chamber Size(mm)</b>	φ270*460
<b>Sterilization Class</b>	Class B
<b>Sterilization Temperature</b>	121°C/134
<b>Drying System</b>	Vacuum drying system
<b>Display</b>	LCD display
<b>Testing System</b>	B&D Test Vacuum Test Helix Test
<b>Control Precision</b>	Temperature: 1°C Pressure: 0.1bar
<b>Sterilization Data</b>	LM-TTA-B-25B: RS-232 / USBand printer (standard)
<b>Safety System</b>	Hand lock door Pressure lock system Relief valve in case of over pressure Pressure or temperature over load protection Alarm for system failure, finish reminding, water level warning
<b>Water Supply System</b>	Build-in water tank easy to clean
<b>Water Tank Capacity</b>	3.5L
<b>Water Consumption</b>	0.16L~0.18L in one cycle
<b>Tray Holder</b>	3 pcs SS trays on SS shelf
<b>Chamber</b>	SUS304 Max working pressure: 2.3bar Min working pressure: -0.9bar Design temperature: 140°C
<b>Ambient Temp.</b>	5~40
<b>Noise</b>	<65dB
<b>Consumption</b>	1950VA
<b>Power Supply</b>	Standard: 220V±10%,50Hz/60Hz; Optional: 110V±10%,50Hz/60Hz. Wiring Method: Plug
<b>External Size(W*D*H)mm</b>	540*600*440
<b>Package Size(W*D*H)mm</b>	610*810*590
<b>Gross Weight(kg)</b>	50kg
Note: It is applicable to the altitude below 3000 meters, and the parts need to be changed when the altitude is over 2000 meters.	



M: +91 8130383561, 9350831213 | E: cto@luxmed.in

SCAN & SEND MESSAGE :



SCAN & FOLLOW US ON :





# Table Top Autoclave - Class B

## Robust and Compact Space-efficient

Hospital CSSD Equipment



**Tray**

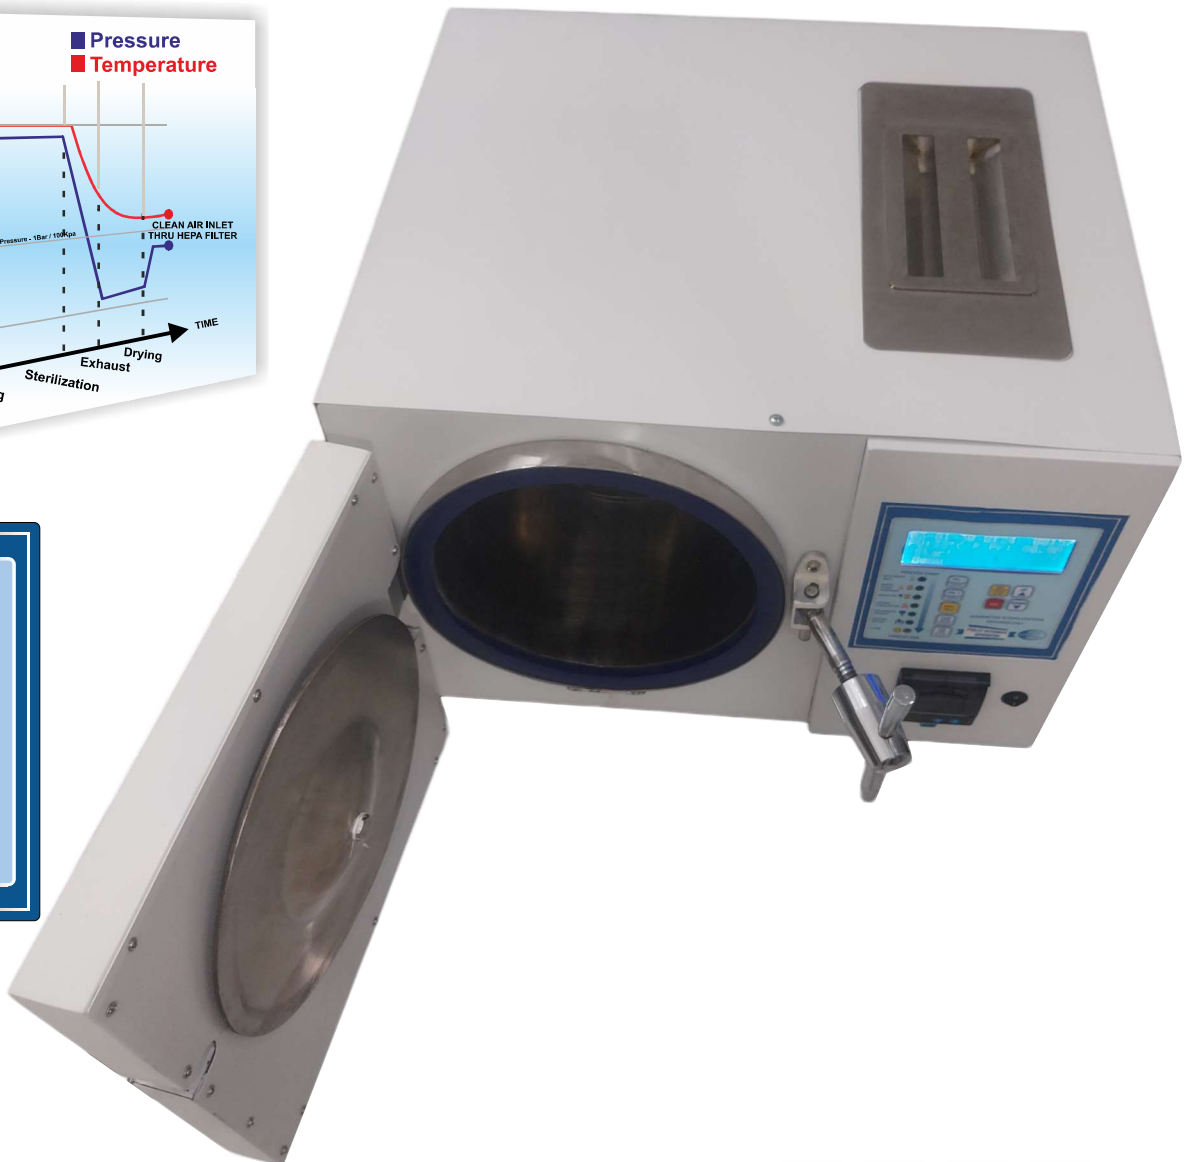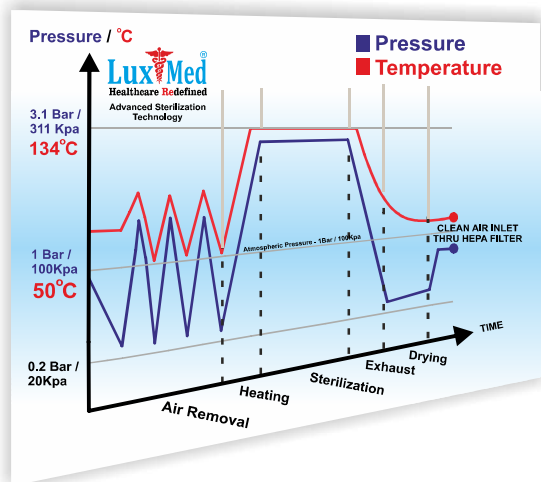

M: +91 8130383561, 9350831213 | E: cto@luxmed.in

SCAN & SEND MESSAGE :



SCAN & FOLLOW US ON :

